

Leakage Current

LCB-990




FAST



SAFE



RELIABLE

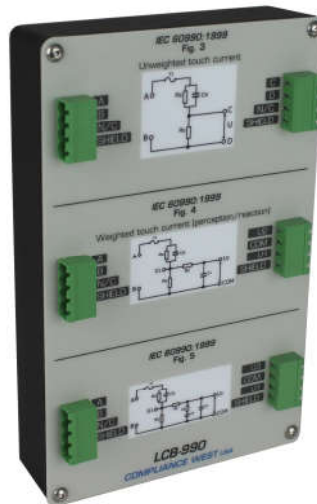

LCB-990

Designed to provide a fast, safe and reliable method of measuring unweighted touch current, touch current weighted for perception or reaction and touch current weighted for let-go. Measures DC and AC currents: calibrated frequency response 20Hz to 1MHz. Designed and built in accordance with IECEE OD-5013 and IECEE OD-5014, as well as in accordance with the applicable transfer impedance requirements in IEC 60990.




Features

- Provides networks for:
 - IEC 60990:2016 Fig. 3
 - IEC 60990:2016 Fig. 4
 - IEC 60990:2016 Fig. 5
- Portable, lightweight
- Measures 4.5 x 7.4 x 2.4 in.
- No batteries or power required
- Custom test leads available
- Provided with NIST calibration; A2LA calibration available; 20 Hz-1Mhz
- One year warranty

www.compwest.com


(800) 748-6224




COMPLIANCE WEST USA
The blue box that tests. And tests.

Ver.2.1 190405


Instrument Configurations



Compliance to:
 Config 1:
 IEC 60990:2016 Fig. 3
 (unweighted touch current)
 IEC 61010-1:2016 Fig A.3

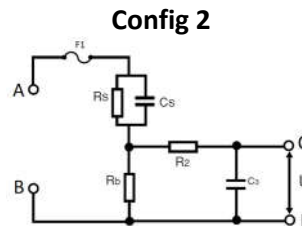

Compliance to:
 IEC 60990:2016 Fig. 4
 (weighted for perception)
 IEC 60950-1:2013 Fig. D.1
 IEC 61010-1:2016 Fig. A.1
 IEC 60335-1: 2016 Cl. 13.2

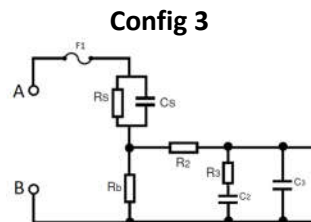

Compliance to:
 IEC 60990:2016 Fig. 5
 (Weighted for let-go)

Specifications

| | |
|-----------------------|------------------------------------|
| Input Voltage Rating: | 0-265Vac, 0-300Vdc |
| Input Current Rating: | 100 mAac, 100mAdc (fuse protected) |
| Frequency Response: | 20Hz – 1MHz |

Environmental

| | |
|--------------------------|-------------------------|
| Operation Temperature: | 15 - 40 °C |
| Relative Humidity Range: | 0 - 90 % Non-Condensing |

General

| | |
|------------------|--|
| Dimensions: | 4.5 in. Wide x 7.4 in. High x 2.4 in. Deep |
| Weight: | 4.5 oz (125 gr) |
| Product Package: | LCB Leakage Current Product Manual Pluggable terminal blocks with input and output test leads NIST Traceable Calibration Certificate to ANSI Z540, 20Hz to 1Mhz |